


MSW FMS912A

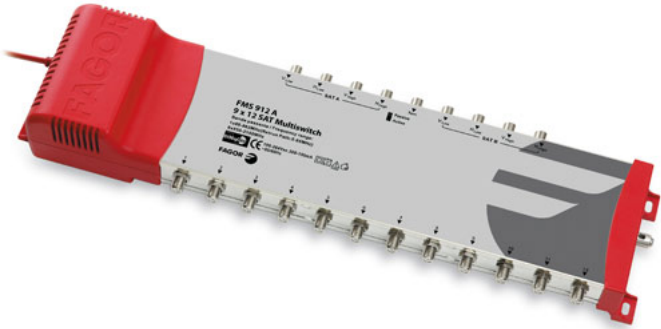

Self-powered IF Multiswitch. 8+1 inputs/ 12 outputs

Manufacturer: [Fagor](#)

Description

MODEL		FMS 908 A	FMS 912 A
Reference		86414	86420
Inputs		8 Sat. + 1 Terr	
Outputs		8	12
Frequency Range	Return Path	8 - 65	
	Terr SAT	88 - 662 950 - 2150	
Gain	Return Path	-18	-20
	Terr Passive *	-20	-22
	Terr Active *	3 ± 2,0	3 ± 2,0
	SAT	1 ± 2,0	1 ± 2,0
Max. output level	Terr Active * DIN 45004B - 80 dB	90	
	SAT DIN 45004B - 35 dB	105	
Rejection between inputs	Terr to SAT	30	35
	SAT to Terr	30	30
Isolation between outputs	SAT - SAT	30	30
		dB	
Polarisation control		13Vdc / 19Vdc • 0 / 22 KHz	
Satellite control		Diasec2.0	
Max. LNBs current		mA 1000	
Input return losses		dB 10	
Output return losses		dB 10	
Connectors		F (f)	
Current consumption from receiver		mA - Max 70	
Supply voltage		Vdc 230 ± 15% / 50 Hz	
Power consumption	Terr Passive *	W 3,8	
	Terr Active *	4,2	
Operating temperature range		°C -10 à 55	
Packing dimensions		mm 337 x 131 x 63 458 x 131 x 63	
Weight		Kg 1,42 1,42	

* Terr Active or Passive selectable by switch.