


CABL SZ-CAT6 FTP

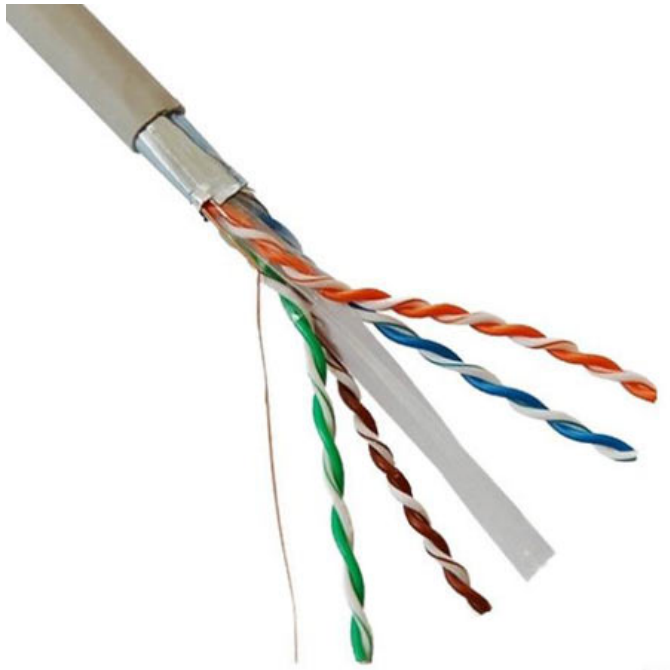

CAT6 | FTP | CCA | 7.2MM | 305M

Manufacturer: [MPSAT](#)

Description

Application:

Meet ANSI/EIA/TIA 568-B.2-1 requirements

100 Base-T4

100 Base-TX

100VG-AnyLAN

1000 Base – T (Gigabit Ethernet)

155 Mbps ATM

622 Mbps ATM

Description:

Shielded CCA cable, 4 pairs (separated), category 6, solid, with drain wire

Conductor diameter: 0.57 mm (23 AWG)

Insulated conductor diameter: 1.1 ± 0.05 mm

Drain wire diameter: 1 / 0.40 ± 0.008 mm or 7/ 0.12 ± 0.008 mm

Outer cable diameter: 7.2 ± 0.20 mm

Jacket thickness: 0.55 mm (Min. Thickness: 0.48mm)

Shield thickness: 0.04 mm

Conductive material: Copper Clad Aluminum

Conductor insulation: HDPE

Shield: Mylar Spirally Wrapped

Cables: CABL SZ-CAT6 FTP

Drain wire: Aluminum Magnesium metal
The cable jacket: PVC

Technical characteristics:
Minimum bend radius: 8 outer cable diameters
Conductor elongation: 15% minimum
Operating temperature: -20°F - +75°F (-4°F - +167°F)
Rip cord has a breaking strength of 6.9 kg (60 N)

Cable is used for indoor installation

PACKAGE INFO:
Standard package: 305 m (1000.66 ft)