


MSW DWA906P

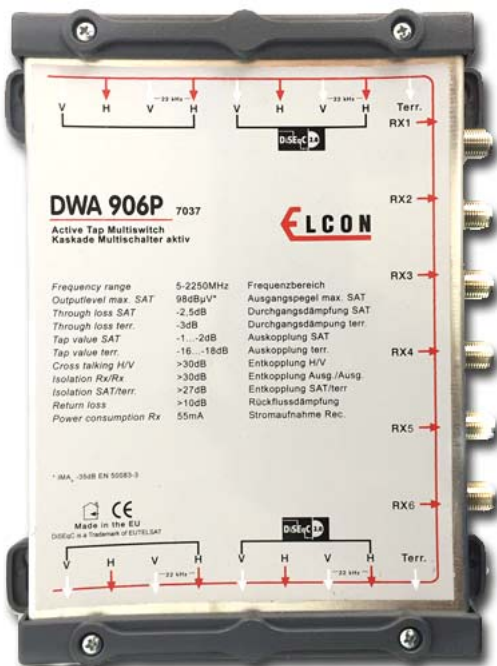

DWA906P 6 USC ACTIVE PASSIVE

Manufacturer: [Elcon](#)

Description		DWA 906P
Frequency range	5 - 2250 MHz	
Output level max. SAT	98 dBµV*	
Through loss SAT	-2.5 dB	
Through loss terr.	-3 dB	
Tap value SAT	-1 ... -2 dB	
Tap value terr.	-16 ... -18 dB	
Cross talking H/V	>30 dB	
Isolation Rx/Rx	>30 dB	
Isolation SAT/terr.	>27 dB	
Return loss	>10 dB	
Power consumption Rx	55 mA	

gh los s ter r.	5. .. - 3 d B
Iso lati on SA T	- 1. .. - 2 d B
Iso lati on ter r.	- 1 6. .. - 1 8 d B
Iso lati on SA T/t err .	> 2 7 d B
Re tur n los s	> 1 0 d B
Po we r c on su mp tio n Rx	5 5 m A