


MSW DWA906T

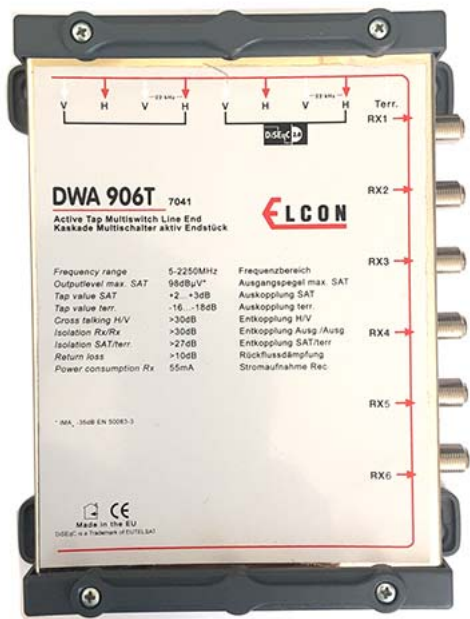

DWA906T 6 USC ACTIVE TERMINAL

Manufacturer: [Elcon](#)

Description		DWA 906T
Frequency Range	5 - 2250 MHz	
Output level max. SAT	98dBµV*	
Tap value SAT	+2, +3dB	
Tap value terr.	-16, -15dB	
Cross talking H/V	>30dB	
Isolation Rx/Rx	>30dB	
Isolation SAT/terr.	>27dB	
Return loss	>10dB	
Power consumption Rx	55mA	
Through loss SAT	-	

Th ro ug h l o s t e r r .	-
Iso lati on SA T	+ 2 .. . + 3 d B
Iso lati on ter r.	- 1 6 .. . - 1 8 d B
Re tur n l o s s	> 1 0 d B
Po we r c o n su m pti o n Rx	5 5