


TAP DER615

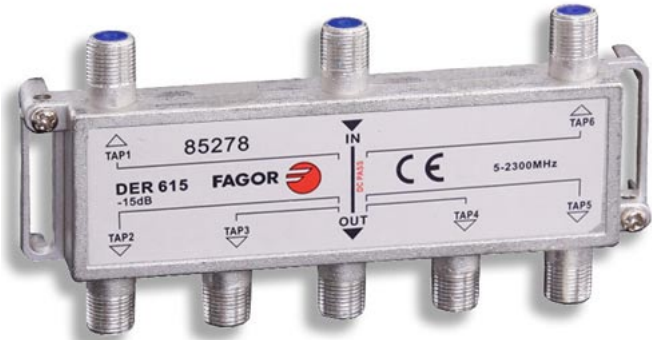

1st IF SAT tap-off, 6 outputs. Tap loss -15dB

Manufacturer: [Fagor](#)

Description

MODEL	TAP-OFFS									
	DER 410	DER 415	DER 420	DER 425	DER 610	DER 620	DER 625	DER 615	DER 625	DER 625
Reference	85274	85275	85276	85277	85278	85279	85280	85281	85282	85283
Nr. of outputs	4				6				8	
Covered band	MHz				5 + 2300					
Tap Loss (a 0.5 dB)	dB				dB				dB	
5 - 47 MHz	4	2	1	1	3,5	1,5	0,5	3,5	1,5	1
47 - 862 MHz	4	2,5	1	1	4	2	1,5	4	2	1
Through loss	dB				dB				dB	
960 - 2150 MHz	5	4	2	2	3	4,5	3,5	3	3,5	2
2150 - 2300 MHz	5,5	4,5	3	2	5,5	5	5	5,5	3,7	2,5
Directional	dB				dB				dB	
5 - 47 MHz	25	30	35	45	25	30	30	25	30	30
47 - 862 MHz	27	28	30	35	22	25	25	22	25	30
960 - 2150 MHz	25	25	25	25	22	25	25	22	25	25
2150 - 2300 MHz	25	25	25	25	22	25	25	22	25	25
Output	dB				dB				dB	
5 - 47 MHz	23	23	23	23	21	24	24	21	24	24
47 - 862 MHz	22	22	22	22	22	22	22	22	22	22
960 - 2150 MHz	21	21	21	21	18	18	18	18	18	18
2150 - 2300 MHz	21	21	21	21	18	18	18	18	18	18
Return	dB				dB				dB	
5 - 862 MHz										
960 - 2150 MHz										
Min. screening	dB				dB				dB	
factor										
5 - 862 MHz										
960 - 2150 MHz										
Packing dimensions (10 u.)	mm				mm				mm	
Weight (10 u.)	Kg				Kg				Kg	