


TAP DER815

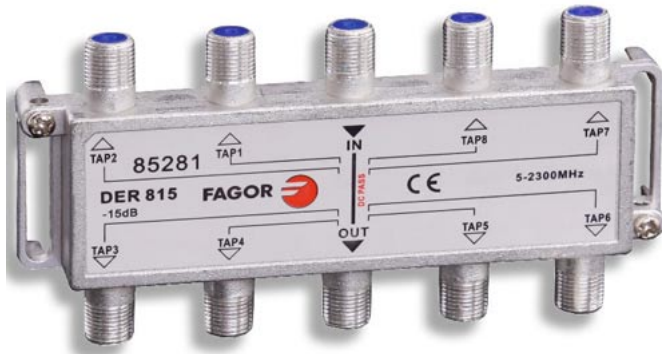

1st IF SAT tap-off, 8 outputs. Tap loss -15dB

Manufacturer: [Fagor](http://www.fagor.com)

Description

MODEL	TAP-OFFS									
	DER 410	DER 415	DER 420	DER 425	DER 615	DER 620	DER 625	DER 615	DER 620	DER 625
Reference	86274	86275	86276	86277	86278	86279	86280	86281	86282	86283
Nr. of outputs	4				6				8	
Covered band	MHz				5 + 2300					
Tap Loss (e 0.5 dB)	dB									
5 - 2300 MHz	10	15	20	25	15	20	25	15	20	25
5 - 47 MHz	4	2	1	1	3,5	1,5	0,5	3,5	1,5	1
47 - 862 MHz	4	2,5	1	1	4	2	1,5	4	2	1
860 - 2150 MHz	6	4	2	2	8	4,5	3,5	8	4,5	2
2150 - 2300 MHz	6,5	4,5	3	2	5,5	5	5	6,5	3,7	2,5
Directional isolation	dB									
5 - 47 MHz	25	30	35	45	25	30	30	25	30	30
47 - 862 MHz	27	28	30	35	22	24	25	22	25	30
860 - 2150 MHz	25	25	25	25	22	25	25	22	25	25
2150 - 2300 MHz	25	25	25	25	21	24	24	20	24	24
5 - 47 MHz	23	23	23	23	22	25	25	22	27	27
Output isolation	dB									
47 - 862 MHz	22	22	22	22	22	22	20	22	22	22
860 - 2150 MHz	21	22	22	22	22	22	20	22	22	22
2150 - 2300 MHz	21	21	21	21	18	16	16	18	18	18
Return losses	dB									
5 - 862 MHz	10									
860 - 2150 MHz	10									
Min. screening factor	dB									
5 - 862 MHz	65									
860 - 2150 MHz	65									
Packing dimensions (10 u.)	mm					mm				
	160 x 105 x 65					205 x 125 x 67				
Weight (10 u.)	Kg					Kg				
	0,70					1,10				